



HUSQVARNA 321S25

Husqvarna 321S25 is a powerful sprayer with large mixture tank for efficient plant care work.



High quality materials

The high quality materials such as brass pump with plated pistons and stainless steel in spray lance secures a sufficient product lifetime and low service cost.



Smart Start®


The engine and starter have been designed so the machine starts quickly with minimum effort. Resistance in the starter cord is reduced by up to 40%.

Comfortable harness

The harness is developed to be comfortable for the operator. The back padding is ventilated and the shoulder straps are broad to give maximum support.

Several nozzle options

Delivered with a straight 90cm adjustable nozzle and a 3 lance nozzle with extension. The connection has a swivel. All for effective use in various applications.

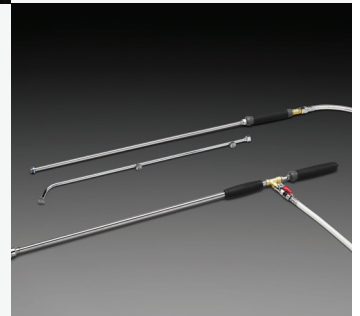

FEATURES

- Broad straps and ventilated back padding make the harness comfortable to wear.
- Smart Start® for easy starting
- Long lifetime is secured by choice of high quality materials.
- comes with a nozzle kit to be effectively used in various applications.
- The water tank is made of transparent material.
- The harness can easily be cleaned.

Technical Specifications	
CAPACITY	
Clutch engagement speed (± 120)	4000 rpm
Clutch engagement upper limit	4120 rpm
Idling speed	3000 rpm
Idling upper limit	3300 rpm
Max spray output	35 kg/cm ²
Maximum discharge pressure	3.5 MPa
Maximum power speed	7000 rpm
Mist drop size High	0 μ m
Mist drop size Low	0 μ m
Mixture tank volume	0 l
Power output	0.7 kW
Racing speed lower limit	7000 rpm
Torque, max.	1.2 Nm
Torque, max. at rpm	6000 rpm
CERTIFICATIONS	
Cert machine dir. 2006/42/EC Decl. No.	No
DIMENSIONS	
Article gross weight	12000 g
Article net weight	10000 g
Coverage horizontally	12 m
Coverage horizontally with mist kit	0 m
Coverage vertically	8 m
Coverage vertically with mist kit	0 m
Mixture tank volume	0 l
Weight	10 kg
ENGINE	
Cylinder bore	33 mm
Cylinder displacement	25.4 cm ³
Cylinder stroke	30 mm
Ignition module air gap	0.3 mm
Fuel tank volume	0.6 l
Power output	0.7 kW
Power source	Petrol
Power/fuel type	Petrol
Spark plug	LD L7T
EQUIPMENT	
Discharge: granule	0 kg/min
Discharge: liquid	4 l/min
Discharge: liquid Capability	1.06 gal/min
Discharge: powder	0 kg/min
Pump type	Horizontal opposed pump
Connectivity	Not applicable
LUBRICANTS	
Fuel consumption	870 g/kWh
Fuel tank volume	0.6 l
Power/fuel type	Petrol
MATERIALS	
Master pack: Paper + Cardboard	0 g
Metal total	0 g
Paper + Cardboard total	0 g
PE total	0 g
PET total	0 g
Plastic foil	0 g
Plastic rigid	0 g
Plastic total	0 g
PS/EPS/HIPS total	0 g
PACKAGING	
Packaging height	660 mm
Packaging length	420 mm
Packaging volume	108.11 dm ³
Packaging width	390 mm
Quantity in Master pack	1